

Precision Voltage Reference

FEATURES

- Very High Accuracy: +4.5 V Output, ± 0.8 mV
- Extremely Low Drift: 1.48 ppm/ $^{\circ}\text{C}$ (-55°C to $+125^{\circ}\text{C}$)
- Excellent Stability: 6 ppm/1000 Hrs. Typical
- Excellent Line Regulation: 6 ppm/V Typical
- Wide Supply Range: +13.5 to +22.0 V
- Hermetic 14-pin Ceramic DIP
- Military Processing Options



APPLICATIONS

- Precision A/D and D/A Converters
- Transducer Excitation
- Accurate Comparator Threshold Reference
- High Resolution Servo Systems
- Digital Voltmeters
- High Precision Test and Measurement Instruments

DESCRIPTION

VRE104 Series Precision Voltage References provide ultrastable +4.5 V outputs with up to ± 0.8 mV initial accuracy and temperature coefficient as low as 1.48 ppm/ $^{\circ}\text{C}$ over the full military temperature range.

These references are specifically designed to be used with the successive-approximation type Analog to Digital Converters (ADCs). This line of ADCs sets new standards for temperature drift, which can only be as good as the external reference used. The VRE104 combined with an ADC will provide the lowest drift data conversion obtainable.

VRE104 series devices are available in two operating temperature ranges, -25°C to $+85^{\circ}\text{C}$ and -55°C to $+125^{\circ}\text{C}$, and two performance grades. All devices are packaged in 14-pin hermetic ceramic packages for maximum long-term stability. "M" versions are screened for high reliability and quality.


Superior stability, accuracy, and quality make the VRE104 ideal for all precision applications which may require a 4.5 V reference. High-accuracy test and measurement instrumentation, and transducer excitation are some other applications which can benefit from the high accuracy of the VRE104.

SELECTION GUIDE

Model	Output (V)	Temperature Operating Range	Volt Deviation (Max)
VRE104C	+4.5	-25°C to $+85^{\circ}\text{C}$	$\pm 0.49\text{mV}$
VRE104CA	+4.5	-25°C to $+85^{\circ}\text{C}$	$\pm 0.40\text{mV}$
VRE104MA	+4.5	-55°C to $+125^{\circ}\text{C}$	$\pm 0.60\text{mV}$

TYPICAL CONNECTION

Figure 1: Typical Connection

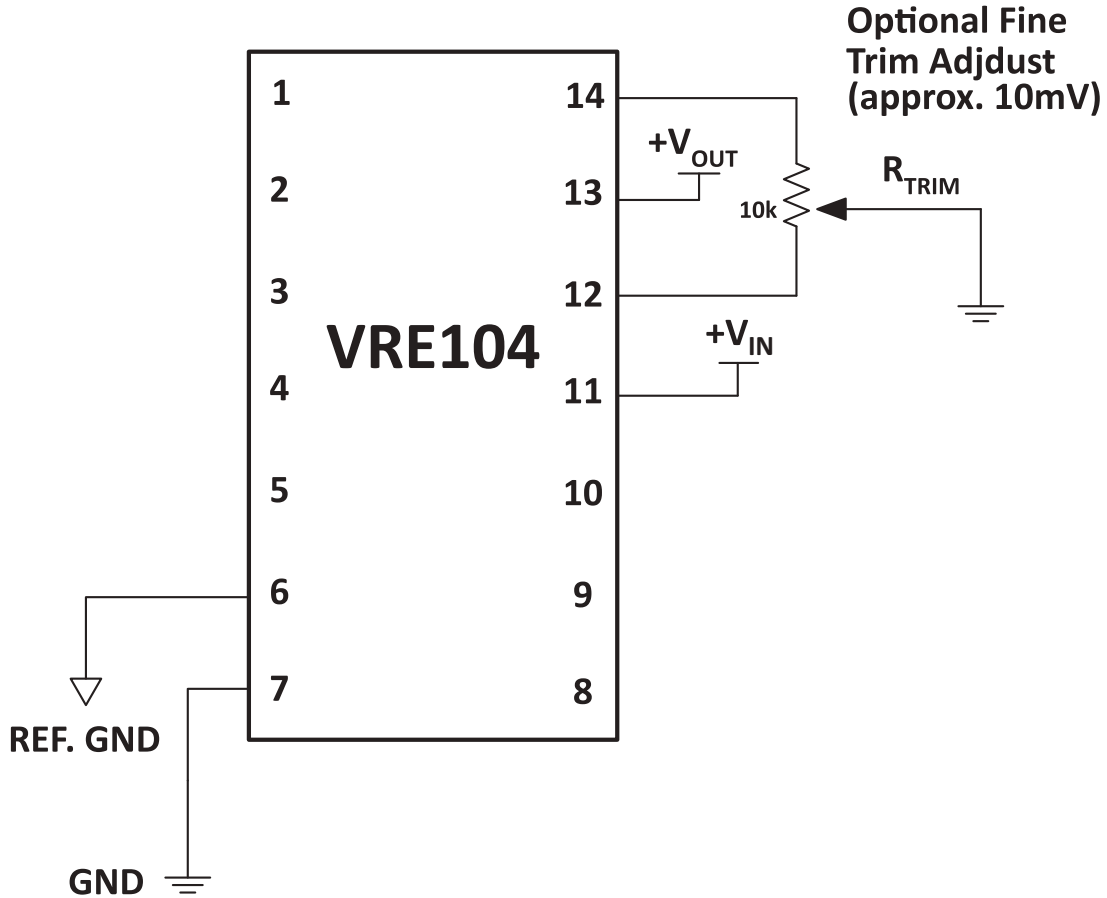

PIN DESCRIPTIONS

Pin Number	Name	Description
6	REF_GND	Provided for accurate ground sensing. Internally connected to GND.
7	GND	Ground.
11	V _{IN}	The supply voltage connection.
12, 14	+ADJ	Optional fine adjustment for approximately ±10 mV on OUT.
13	OUT	4.5 V output.
All Others	NC	No connection.

SPECIFICATIONS

$V_{ps} = +15\text{ V}$, $T = 25^\circ\text{C}$, $R_L = 10\text{ k}\Omega$ unless otherwise noted.

ABSOLUTE MAXIMUM RATINGS

Parameter	VRE104C			VRE104CA			VRE104MA			Units
	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Power Supply	+13.5		+22	*		*	*		*	V
Operating Temperature	-25		-85	*		*	-55		+125	$^\circ\text{C}$
Storage Temperature	-65		+150	*		*	*		*	$^\circ\text{C}$
Short Circuit Protection	Continuous			*			*			

ELECTRICAL SPECIFICATIONS

Parameter	VRE104C			VRE104CA			VRE104MA			Units
	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Output Voltage		+4.5			*			*		V
Initial Error			± 890			± 800			± 800	μV
Warmup Drift		2			1			1		ppm
$T_{\text{MIN}} - T_{\text{MAX}}^1$			490			400			600	μV
Long-Term Stability		6			*			*		ppm/ 1000hrs
Noise (0.1 - 10Hz)		3			*			*		μVpp
Output Current	± 10			*			*			mA
Line Regulation		6	10		*	*		*	*	ppm/V
Load Regulation		3			*			*		ppm/ mA
Output Adjustment		10			*			*		mV
Temperature Coefficient		4			*			*		mV/ $^\circ\text{C}$ / mV
Power Supply Current, +PS ²		5	7		*	*		*	*	mA

1. Using the Box Method, the specified value is the maximum deviation from the output voltage at 25°C over the specified operating temperature range.
2. The specified values are unloaded.

Note: * Same as C Model

TYPICAL PERFORMANCE GRAPHS

Figure 2: V_{Out} vs. Temperature (VRE104C)

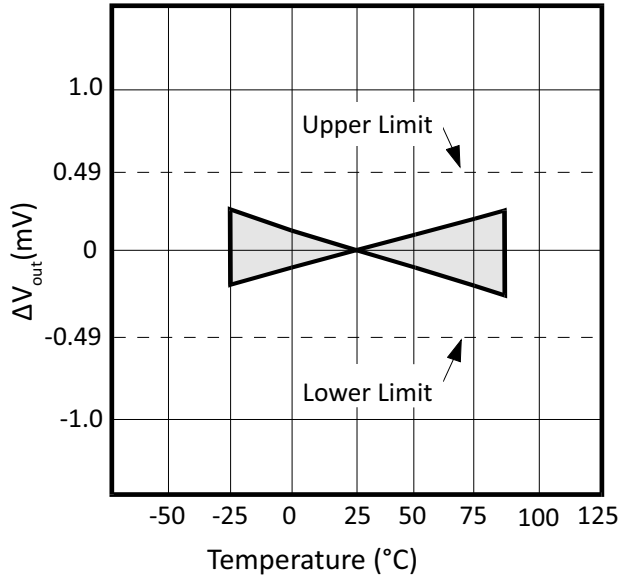


Figure 3: V_{Out} vs. Temperature (VRE104CA)

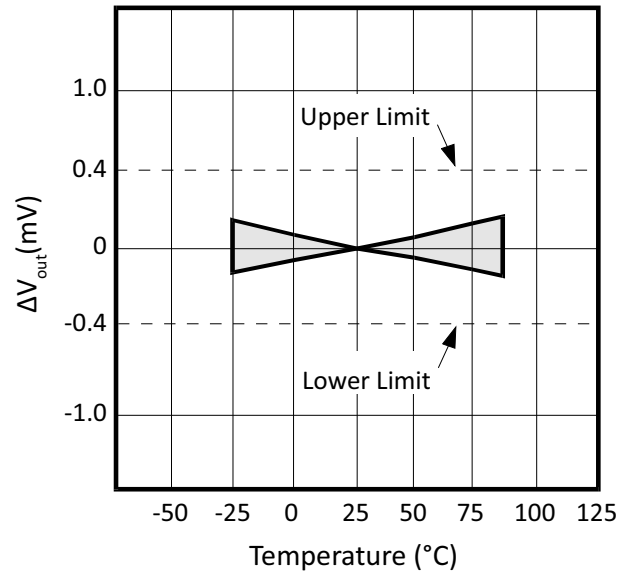


Figure 4: V_{Out} vs. Temperature (VRE1074MA)

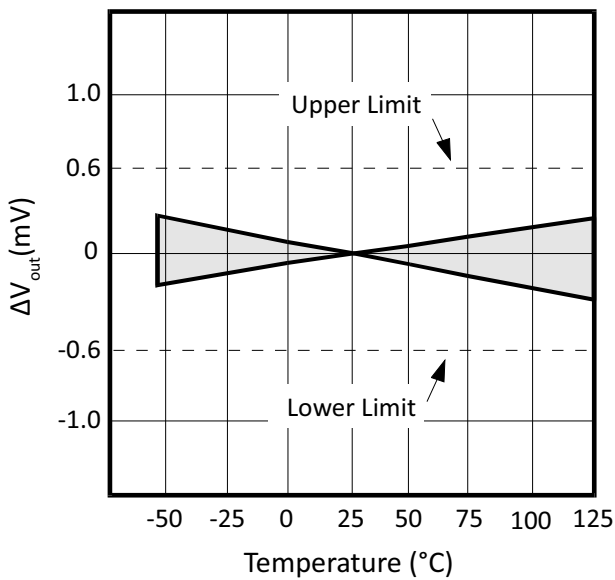


Figure 5: Power Supply Current vs. Temperature

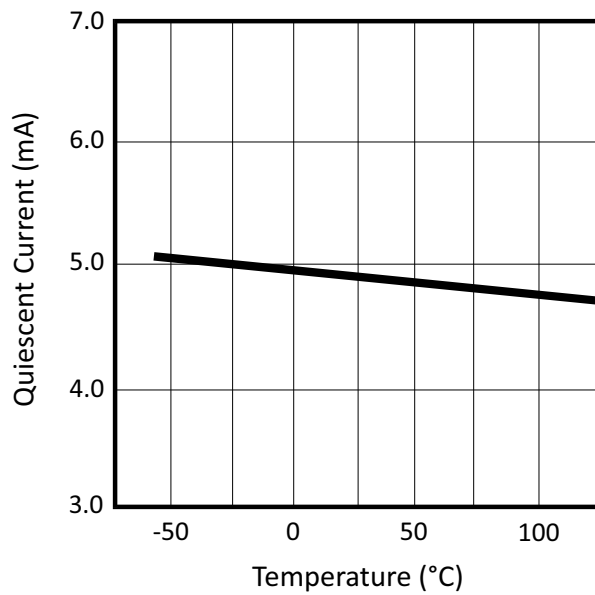


Figure 6: Junction Temp. Rise vs. Output Current



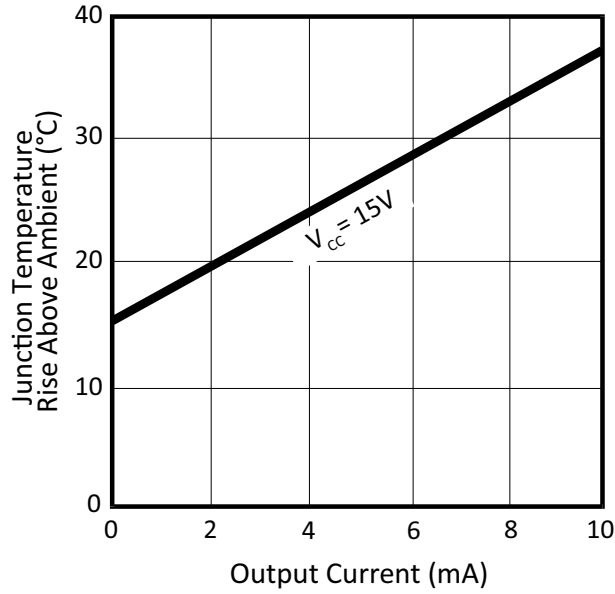


Figure 7: PSRR vs. Frequency

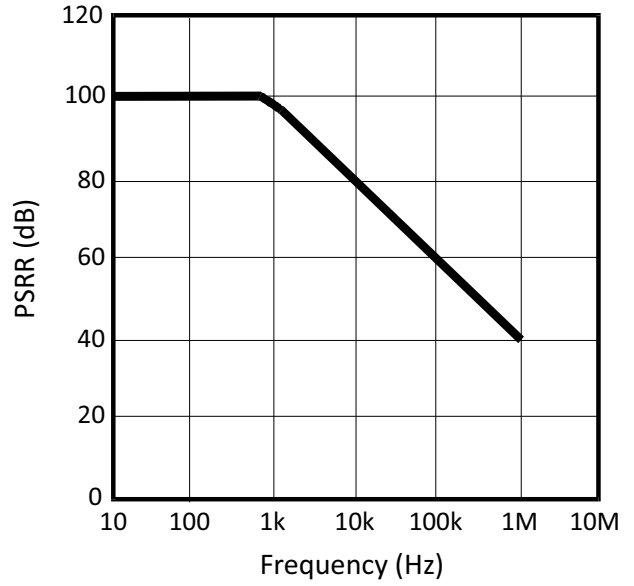

BLOCK DIAGRAM

Figure 8: Block Diagram

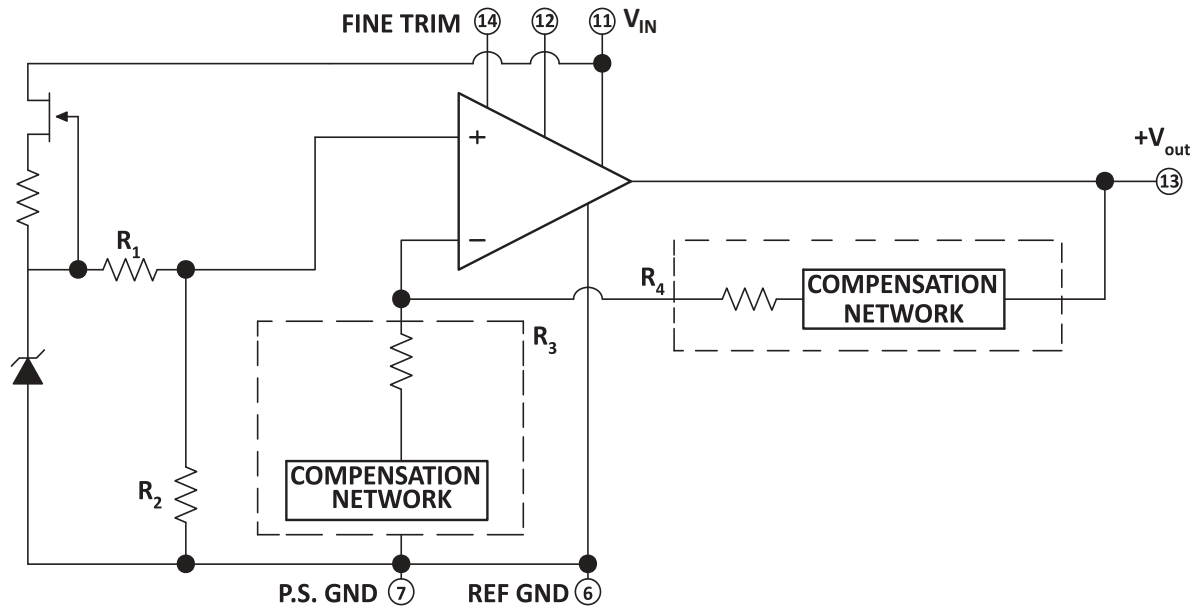

THEORY OF OPERATION

The following discussion refers to the block diagram in Figure 8. A FET current source is used to bias a 6.3 V zener diode. The zener voltage is divided by the resistor network R1 and R2. This voltage is then applied to the noninverting input of the operational amplifier which amplifies the voltage to produce a 4.5 V output. The gain is determined by the resistor networks R3 and R4: $G=1 + R_4/R_3$. The 6.3 V zener diode is used because it is the most stable diode over time and temperature.

The current source provides a closely regulated zener current, which determines the slope of the references' voltage vs. temperature function. By trimming the zener current a lower drift over temperature can be achieved. But since the voltage vs. temperature function is nonlinear, this method leaves a residual error over wide temperature ranges.

To remove this residual error, a nonlinear compensation network of thermistors and resistors has been developed that is used in the VRE104 series references. This proprietary network eliminates most of the non-linearity in the voltage vs. temperature function. By then adjusting the slope, the VRE104 series produces a very stable voltage over wide temperature ranges. This network is less than 2% of the overall network resistance so it has a negligible effect on long term stability.

APPLICATION INFORMATION


The proper connection of the VRE104 series voltage references is shown in figure 1 with the optional trim resistors. Pay careful attention to the circuit layout to avoid noise pickup and voltage drops in the lines.

The VRE104 series voltage references have the ground terminal brought out on two pins (pin 6 and pin 7) which are connected together internally. This allows the user to achieve greater accuracy when using a socket. Voltage references have a voltage drop across their power supply ground pin due to quiescent current flowing through the contact resistance. If the contact resistance was constant with time and temperature, this voltage drop could be trimmed out. When the reference is plugged into a socket, this source of

error can be as high as 20 ppm. By connecting pin 7 to the power supply ground and pin 6 to a high impedance ground point in the measurement circuit, the error due to the contact resistance can be eliminated. If the unit is soldered into place, the contact resistance is sufficiently small that it does not effect performance.

TYPICAL APPLICATION


Figure 9: VRE104 Used With Crystal Semiconductor ADC

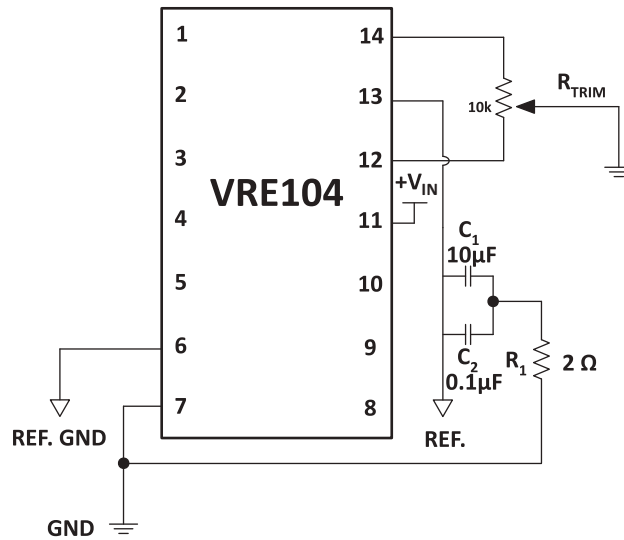

Suggested Reading: Crystal Semiconductor Application Note - "Voltage References for the CS501X/CS25IIX Series of A/D Converters"

PIN CONFIGURATION

Figure 10: Pin Configuration

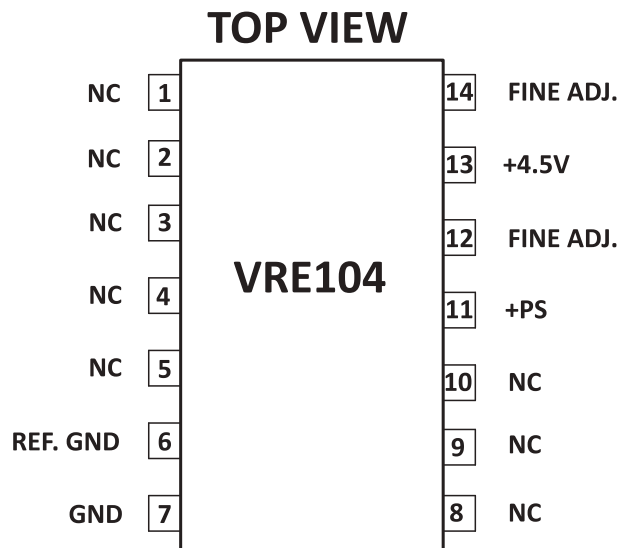


VRE104

PACKAGE OPTIONS

Part Number	Apex Package Style	Description
VRE104C	HC	Hermetic 14-pin Ceramic DIP
VRE104CA	HC	Hermetic 14-pin Ceramic DIP
VRE104MA	HC	Hermetic 14-pin Ceramic DIP

PACKAGE STYLE HC

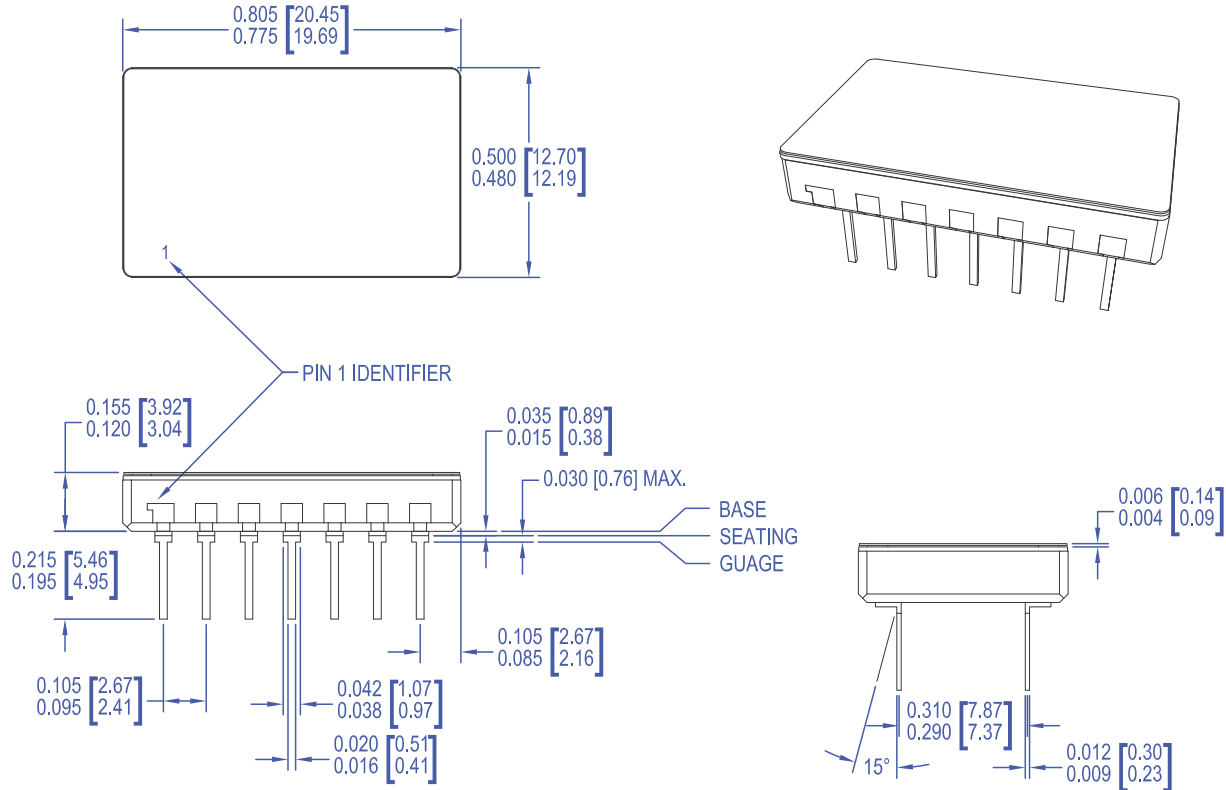

NOTES:

1. Dimensions are inches & [millimeters].
2. Bracketed alternate units are for reference only.
3. Pins: Phosphor bronze, Gold over Nickel plated.
4. Material: Alumina Ceramic substrate and cover.
5. Cover: Electroless Nickel plated.
6. Package weight: 0.092 oz. [2.605 g].

NEED TECHNICAL HELP? CONTACT APEX SUPPORT!

For all Apex Microtechnology product questions and inquiries, call toll free 800-546-2739 in North America. For inquiries via email, please contact apex.support@apexanalog.com. International customers can also request support by contacting their local Apex Microtechnology Sales Representative. To find the one nearest to you, go to www.apexanalog.com

IMPORTANT NOTICE

Apex Microtechnology, Inc. has made every effort to insure the accuracy of the content contained in this document. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (expressed or implied). Apex Microtechnology reserves the right to make changes without further notice to any specifications or products mentioned herein to improve reliability. This document is the property of Apex Microtechnology and by furnishing this information, Apex Microtechnology grants no license, expressed or implied under any patents, mask work rights, copyrights, trademarks, trade secrets or other intellectual property rights. Apex Microtechnology owns the copyrights associated with the information contained herein and gives consent for copies to be made of the information only for use within your organization with respect to Apex Microtechnology integrated circuits or other products of Apex Microtechnology. This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale.

APEX MICROTECHNOLOGY PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED TO BE SUITABLE FOR USE IN PRODUCTS USED FOR LIFE SUPPORT, AUTOMOTIVE SAFETY, SECURITY DEVICES, OR OTHER CRITICAL APPLICATIONS. PRODUCTS IN SUCH APPLICATIONS ARE UNDERSTOOD TO BE FULLY AT THE CUSTOMER OR THE CUSTOMER'S RISK.

Apex Microtechnology, Apex and Apex Precision Power are trademarks of Apex Microtechnology, Inc. All other corporate names noted herein may be trademarks of their respective holders.